



RGP30A thru RGP30M

Glass Passivated Junction Fast Switching Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 3.0 Amperes

Features


- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Cavity-free glass passivated junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ High temperature metallurgically bonded construction
- ◆ 3.0 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less < $0.2\mu\text{A}$
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



DO-201AD

Mechanical Data

- ◆ Case: JEDEC DO-201AD, molded plastic over glass body
- ◆ Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting Position: Any
- ◆ Weight: 0.042 ounce, 1.195 grams

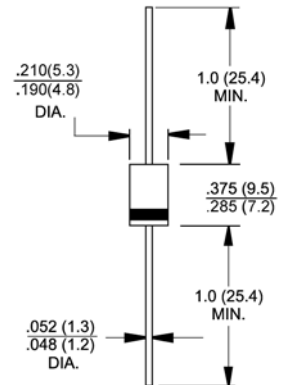

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	RGP 30A	RGP 30B	RGP 30D	RGP 30G	RGP 30J	RGP 30K	RGP 30M	Unit	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{F(AV)}$	3.0							Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	125.0							Amps	
Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{R(AV)}$	100							μA	
Maximum instantaneous forward voltage at 3.0A	V_F	1.3							Volts	
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	I_R	5.0 100							μA	
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_r=0.25\text{A}$	t_{rr}	150				250		500		μs
Typical junction capacitance at 4.0V, 1MHz	C_J	60.0							pF	
Typical thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	20.0							$^\circ\text{C}/\text{W}$	
Operating junction and storage temperature range	T_J , T_{STG}	-55 to +150							$^\circ\text{C}$	

Notes: 1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

